Kvichak Marine Industries

65' PATROL CATAMARAN

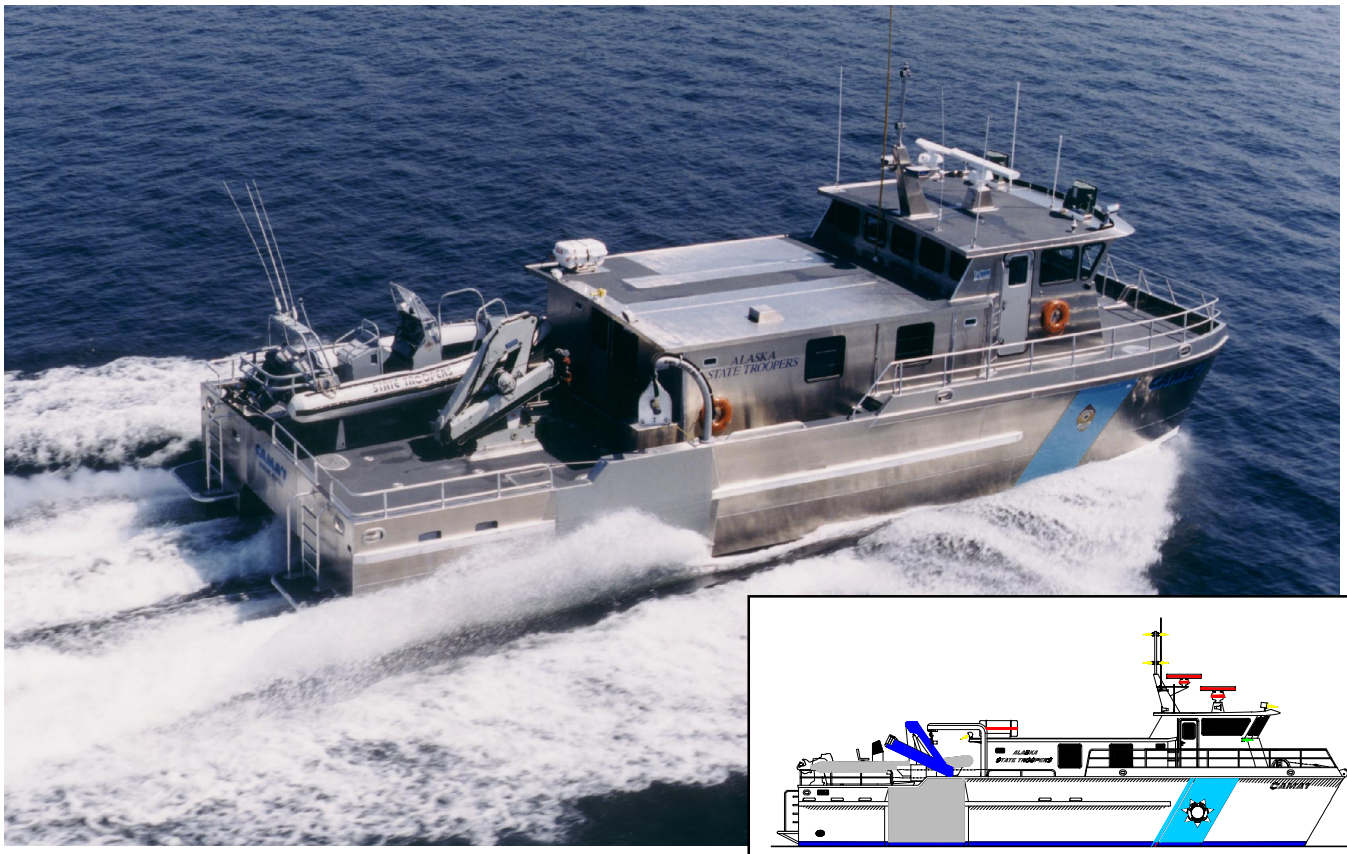

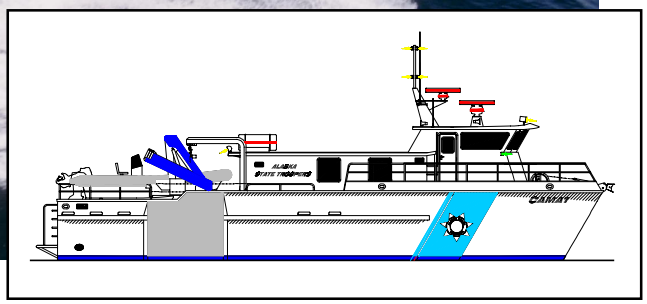

STANDARD SPECIFICATIONS

Construction	Kvichak Marine Ind.
Design	Crowther Multihulls
Length (overall)	66' - 7" (20.29m)
Beam	24' - 6" (7.47m)
Displacement (RFS)	~59,500 lbs. (27,370 kg)
Fuel capacity	1350 gallons (5,116ℓ)
Bottom plate	0.250"
Side plate	0.250" & 0.190"
Deck plate	0.190"
Top speed (approx.)	25 knots
Main engines	(2) Caterpillar 3196 DITA 660BHP @ 2300 RPM
Marine gears	Twin Disc MG 5114A, 1.92:1 Reduction
Propellers	30" diameter
Steering	Power
Deck crane	Morgan, 4000# cap.
Pot hauler & davit	Kolstrand
Rigid Inflatable Boat	19' Naiad
Anchor winch	Kolstrand
Generators	(2) 32kW Northern Lights

469 NW Bowdoin Place • Seattle, WA 98107 USA
Phone: (206) 545-8485 • FAX (206) 545-3504 • E-mail: sales@kvichak.com
Web site: www.kvichak.com